



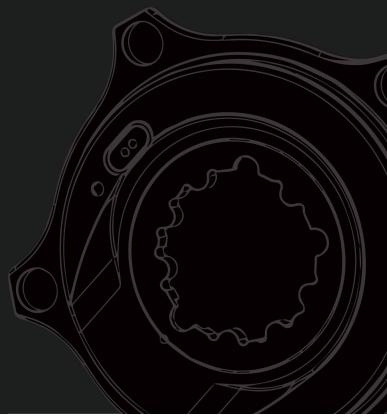

VELO-PARTS.CH

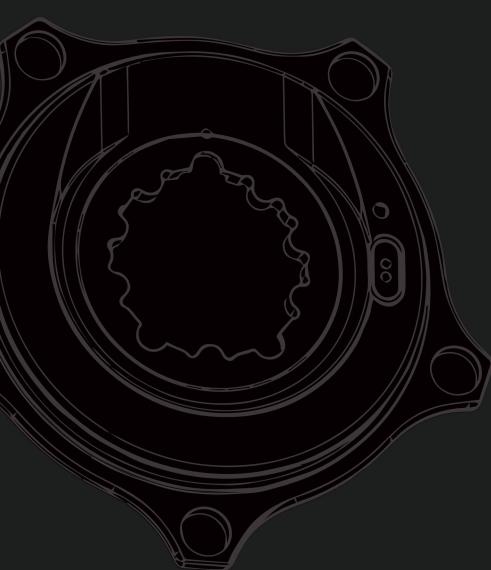

SIGEYI **SWISS EDITION**

**AXO/AXOccPower Meter
User Guide**

For Model : AXOPM01/AXOPM012/AXOPM013/AXOcc PM014 (English)

CONTENT

- ① AXOor AXOccPower Meter×1
- ② Stickers×1
- ③ User Guide×1
- ④ Magnetic Charging Cable×1 (for AXO)
- ⑤ CR2032×1, Cell Cover×2 (for AXOcc)

INSTALLATION

AXO/AXOccPower Meter is a precision mechanical measuring equipment. Please note to keep clean and accuracy during installing.

- Thoroughly clean up the surface between the crank and spider till no grease or dust on it.
- Please install the spider to the crankarm according to the tightening torque marked on the spider.
- Please install the chainring to the spider according to the tightening torque printed on the chainring's instruction book.
- After correctly install, use the power meter for 1 or 2 times, it would be accurate as it should.
- Please make sure that the crankarm is on the right side of the charging port when you install AXO. Damage caused by incorrect installation is beyond the scope of the warranty.

CALIBRATION / ZERO RESET

AXO/AXOccPower Meter can be zeroed without any manual operation. If manual zero reset is needed, there are 2ways:

- ① Rotate the crankarm backward at any time.
- ② When Power Meter is under no-load (Feet leave from pedals and pedals do not touch anything), press the cycling-computer's 'calibrate' button to perform zero reset.

*Please perform manually calibration after power meter installation or changing the chainring.

CONNECT TO CYCLING– COMPUTER AND SMART PHONE

Rotate the crankarm to activate AXO power meter.

Cycling computer :

Turn on the cycling-computer, search power meters and connect AXO/AXOcc directly, or enter it's ANT ID to connect.

Phone :

When connecting to a smart phone, please turn on smart phone's Bluetooth and choose AXO/AXOccinAPP directly. DO NOT pair in the Bluetooth Setting of the smart phone.

SLEEP MODE

AXO/AXOccPower Meter will enter into sleep mode automatically after 5 minutes of inactivity to save power. Rotate the crankarm to activate it.

SPECIFICATIONS

Accuracy: $\pm 1\%$
Power Measurement Range: 0~2000W
Cadence Measurement Range: 30~220RPM
Operation Temp: -20°C~50°C
Battery Life: 300hours
(for given temperature of 25°C)
Standby Time: >1year
Data Protocol: ANT+,Bluetooth 4.0
Waterproof Level: IP67
Weight: 101g AXO SRAM-3-4-110Version)
Data: Power/Cadence/LRbalance
Warranty: 2 years

BATTERY

AXO

The AXOPower Meter should be charged with a 5VACUSB adapter and a paired magnetic charging cable. Once charging begins, the LED will light up. When charging is completed, the LED will go off. It takes 3~4hours to fully charge the battery.

When battery is very low, data accuracy may decrease. Please charge in time.

AXOCC


Use CR2032button battery, battery life depends on the battery capacity.
When battery is very low, data accuracy may decrease. Please change battery in time.

Check Battery Level

Battery level can be checked in 'Power Meter Details' on the cycling computer or SIGEYI App.

Please try to avoid the battery level below 10%. Battery over discharge will cause irreversible damage to the battery. If you do not ride for a long time, please fully charge the battery first.

LED Flashing

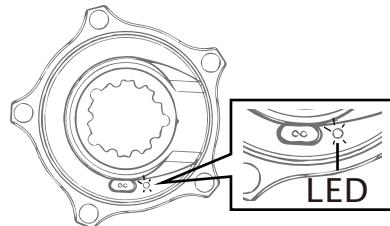

LED	Check Battery Level
Quick flashing: ☀️ ○ ☀️ ○	<input type="checkbox"/> battery is very low, please charge
When power meter is woken up: ☀️ × 1 ☀️ × 2 ☀️ × 3 ☀️ × 4 ☀️ × 5	<input type="checkbox"/> battery is very low, please charge <input type="checkbox"/> battery is Low <input type="checkbox"/> battery is OK <input type="checkbox"/> battery is Good <input type="checkbox"/> battery is NEW

MAINTENANCE

- Except for charging and daily cleaning, no attempt should be made to adjust or alter the power meter.
- When cleaning the power meter, use only neutral detergent water dampened cloth to wipe off dirt and debris. Never use any harsh cleaning chemicals that may damage the plastic housing or corrode the magnetic charging metal contacts.
- AXOand AXOccare designed to be fully waterproof to withstand wet weather conditions. However, do not place the power meter into water. Do not spray the power meter directly with high pressure water.
- The operating temperature range for AXO or AXOcc is -20°Cto 50°C. Do not use it in temperatures outside this range, otherwise it may cause damage to the power meter.
- Do not subject the crankset or the power meter to strong shocks, otherwise it may cause damage.
- Make sure the power meter and related parts are installed correctly.
- For AXOcc,after cleaning or wet weather condition using,please open the Cell Cover,clean up and dry the inside. The normal operation of the power meter will not be affected by the water entering the cell case, but the battery life may shorten.

- Sweat may corrode the metal parts of the power meter. Please clean it, especially after using the bike trainer.

FIRMWARE UPGRADE

SIGEYI provides a dedicated app for firmware updates.

For firmware update procedures, please visit SIGEYI official website: www.sigeyi.cn.

CONTACT

Email : info@velo-parts.ch

Official website : www.sigeyi.cn

Official Distribution for Switzerland,
Germany and Austria:

Veloparts GmbH

Im Giessen 25

8868 Oberurnen

www.velo-parts.ch

DISCLAIMER

The company reserves the right to change product specifications without notifying the individual user.

SIGEYI

Power Meter Warranty Card

Thanks for purchasing SIGEYI products:

1. From the date of sale, the user has a two-year warranty that covers damage caused by non-human factors.
2. Disassembling the AXO or AXOcc Power Meter is regarded as abandoning the warranty.
3. Production damage caused by improper install or use is not covered by the warranty.

Model

AXO

AXOcc

AXPOWER

DLS


Serial Number _____

PD _____

Repair Detail

Data	Reasons or Phenomena	Results	Comment

Installation Notes ⓘ

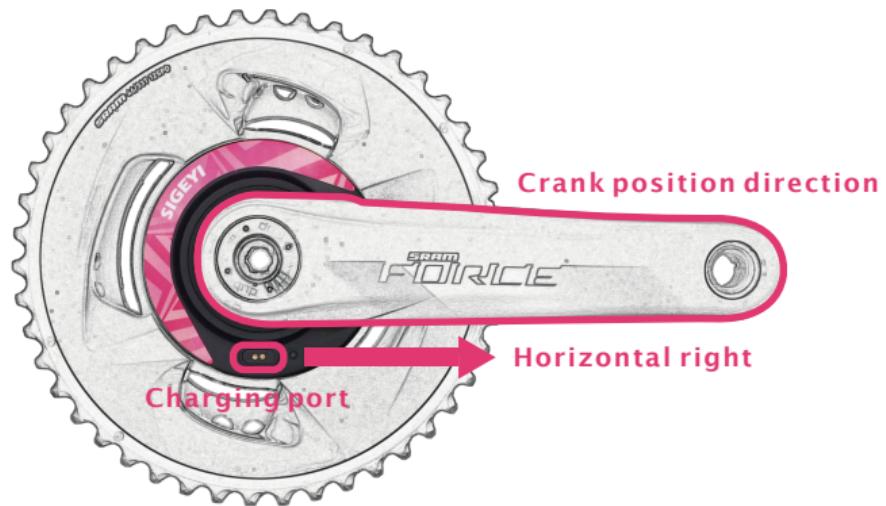


Please install the crank in the direction shown above.

SIGEYI

How to check battery level?

View by LED

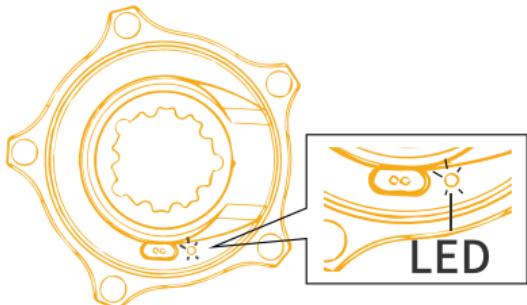

LED	Check Battery Level
Quick flashing: 	<input type="checkbox"/> battery is very low, please charge
When power meter is woken up :  ×1  ×2  ×3  ×4  ×5	<input type="checkbox"/> battery is very low, please charge <input type="checkbox"/> battery is Low <input type="checkbox"/> battery is OK <input type="checkbox"/> battery is Good <input type="checkbox"/> battery is NEW


• AXO/AXOccPower Meter will enter into sleep mode automatically after 5 minutes of inactivity to save power. Rotate the crankarm to activate it.

• You can also check the battery level through the cycling computer or SIGEYI APP. For details, please refer to the power meter user guide.

• Please try to avoid the battery level below 10%. Battery over discharge will cause irreversible damage to the battery. If you do not ride for a long time, please fully charge the battery first.

SIGEYI

How to calibrate/zero rest ?

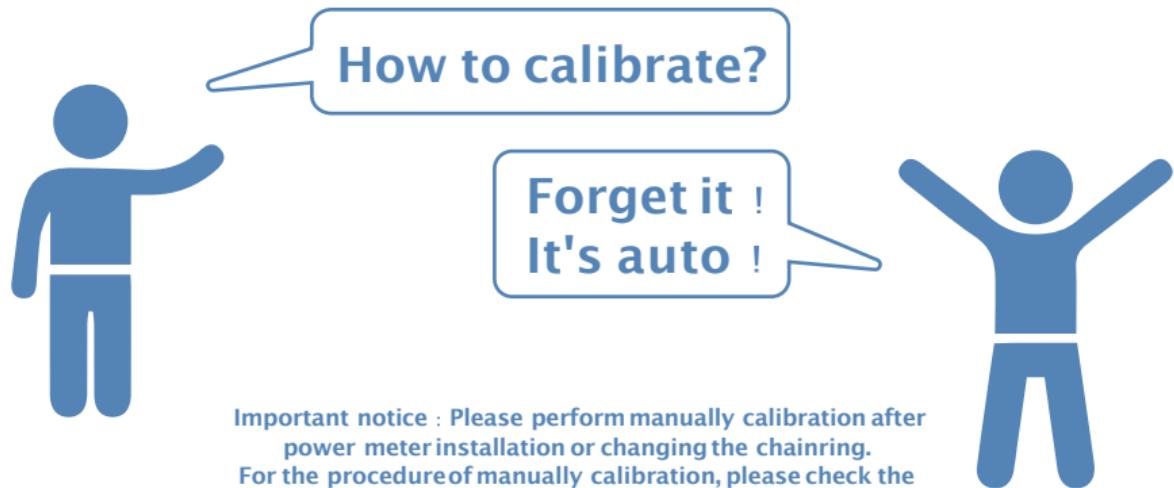

Important notice : Please perform manually calibration after power meter installation or changing the chainring.
For the procedure of manually calibration, please check the [Calibration/ZeroReset procedure in the user manual](#).

Just ride !
AXO/AXO can be zeroed without any manual operation.
No need to care about whether your riding will affect it or not.

SIGEYI